



PLEASE READ THROUGH INSTRUCTIONS ONCE BEFORE ASSEMBLING

(1) SLIP ON CHANNEL END CAPS (ONE ON EACH END OF PLANKS). IF NECESSARY, TAP LIGHTLY WITH A WOOD BLOCK OR RUBBER Mallet. TAP ONLY ON THE CORNERS OF THE CHANNEL END CAPS. LONG LEG OF CHANNEL END CAPS SHOULD BE PLACED ON THE UNDERSIDE OF PLANK. DRILL $3/16"$ HOLES THROUGH CHANNEL END CAP AND PLANKS AS SHOWN ON DRAWING. INSERT DRIVE RIVETS INTO HOLES AND HIT FIRMLY WITH A HAMMER. REPEAT ON OTHER END.

(2) PLACE DMTS FRAMES ON FIRM LEVEL GROUND APPROXIMATELY SIX FEET APART. ATTACH HORIZONTAL BRACE TO FRAMES AS SHOWN ON DRAWING WITH $7/16"$ x 3" MACHINE BOLTS AND $7/16"$ HEX NUTS.

(3) PLACE PLANKS AGAINST DMTS FRAMES SO THAT PLANK DOES NOT OVERHANG THE END MOST FRAMES MORE THAN 1'-6" (3" MIN. TO 1'-6" MAX.). SEE DRAWING FOR FURTHER CLARIFICATION. ATTACH PLANKS TO DMTS FRAMES USING (4) BOLT CLIPS, $5/16"$ x 3" CARRIAGE BOLTS, LOCK WASHERS, AND HEX NUTS. MAKE SURE THAT FRAMES ARE PERPENDICULAR TO PLANKS. SEE BOLT CLIP DETAIL.

(4) TIGHTEN ALL BOLTS.

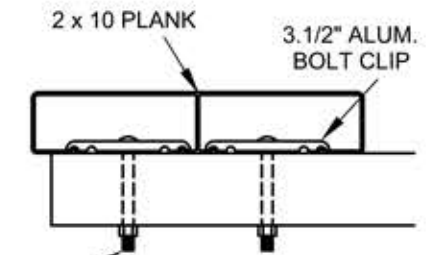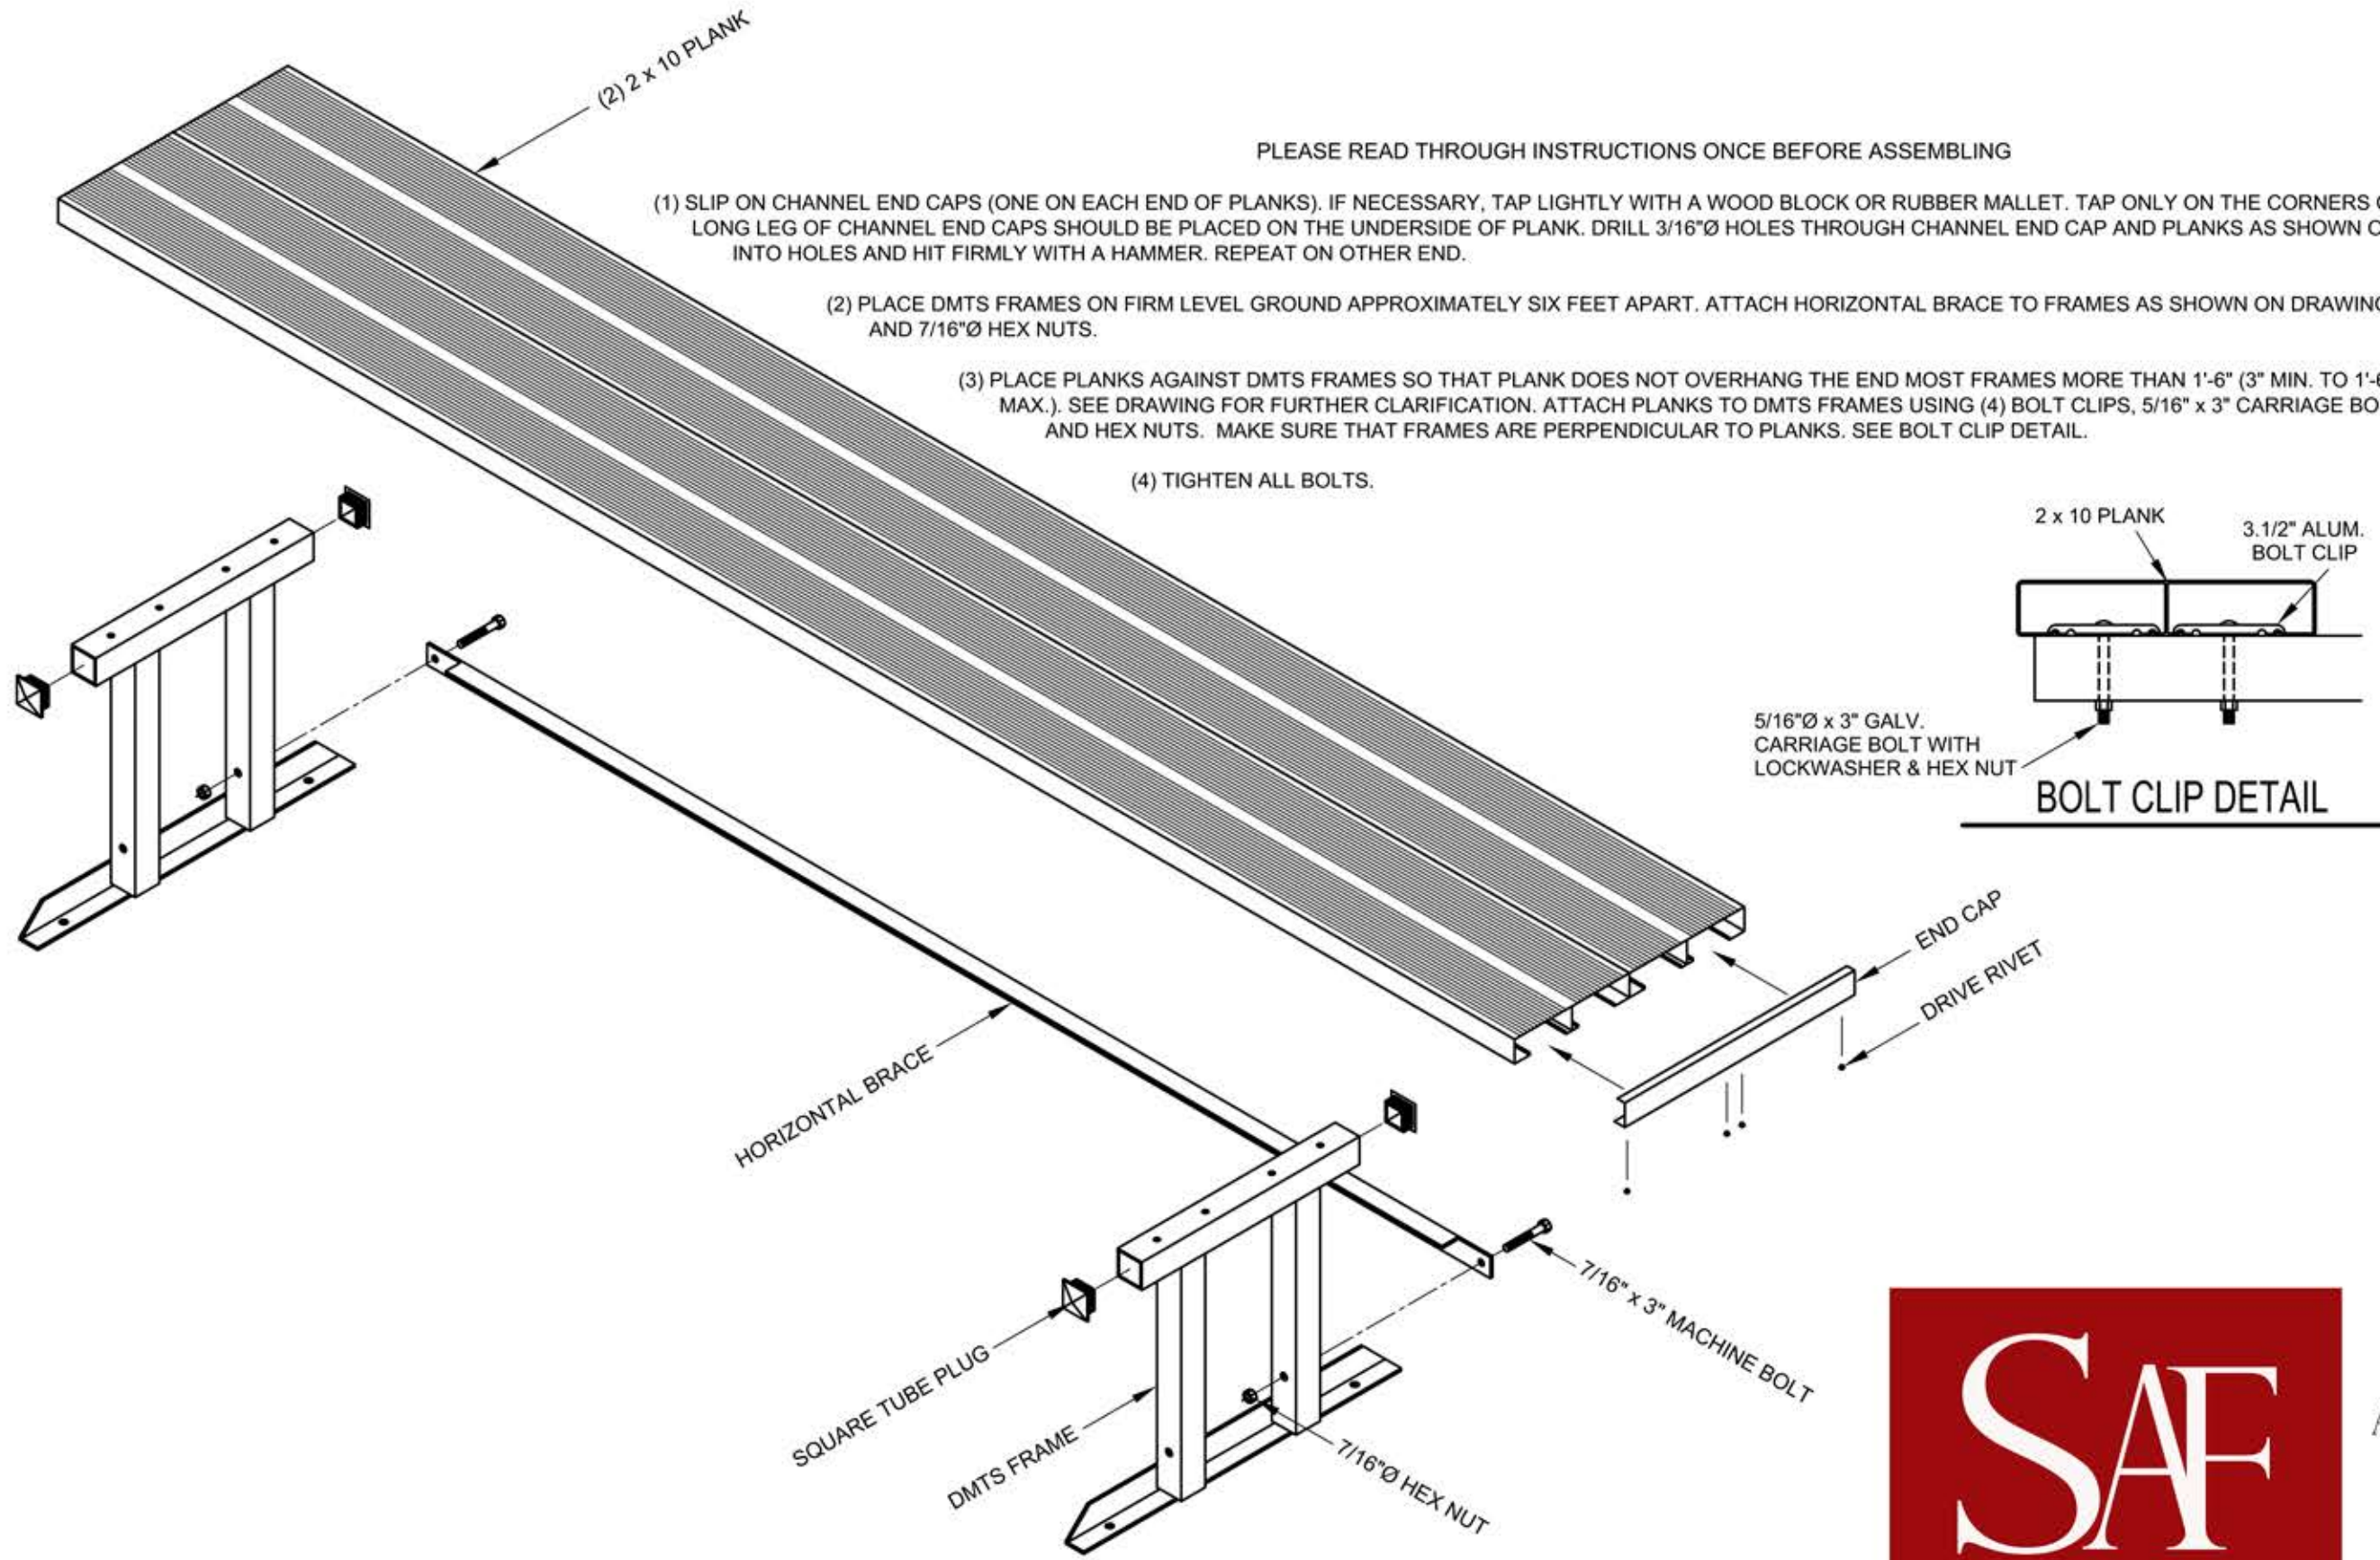

BOLT CLIP DETAIL

$5/16"$ x 3" GALV.
CARRIAGE BOLT WITH
LOCKWASHER & HEX NUT

END CAP
DRIVE RIVET

$7/16"$ x 3" MACHINE BOLT

$7/16"$ HEX NUT



SIGHTLINES
ATHLETIC FACILITIES
CRESTWOOD, KY
800-609-1545